

24 Volt Dry Charged Batteries for General Aviation Single and Twin Engine Aircraft



G-240

- 24 Volts
- 8 AH at the 1 Hour Rate
- 13 Amps 30 Minute Emergency Capacity
- 106 CCA at 0° F for 60 Seconds
- 23 Lbs. (Filled)
- 1.285 SG Electrolyte, 2 Quarts



G-241

- 24 Volts
- 8 AH at the 1 Hour Rate
- 13 Amps 30 Minute Emergency Capacity
- 106 CCA at 0° F for 60 Seconds
- 24 Lbs. (Filled)
- 1.285 SG Electrolyte, 2 Quarts



G-242

- 24 Volts
- 10 AH at the 1 Hour Rate
- 17 Amps 30 Minute Emergency Capacity
- 150 CCA at 0° F for 60 Seconds
- 27 Lbs. (Filled)
- 1.285 SG Electrolyte, 2 Quarts




G-243

- 24 Volts
- 10 AH at the 1 Hour Rate
- 17 Amps 30 Minute Emergency Capacity
- 150 CCA at 0° F for 60 Seconds
- 28 Lbs. (Filled)
- 1.285 SG Electrolyte, 2 Quarts


G-240

- Cessna 152, 172, 182

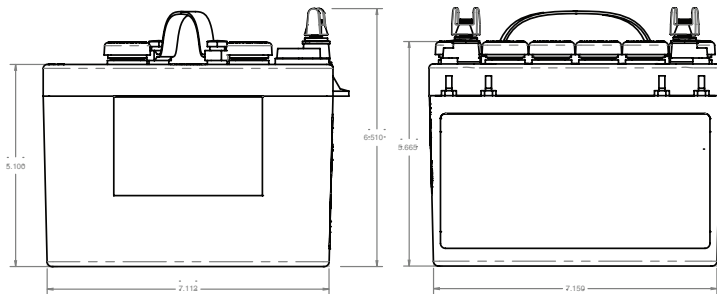


G-241

- Cessna 152, 172, 182

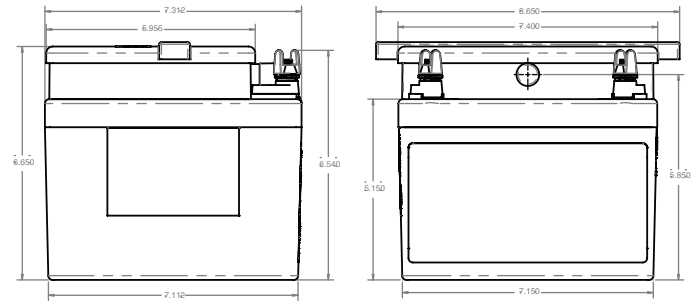


G-242

- Cessna 152, 172, 177, 182, 207, 210, 336, 337
- Piper: PA-23, PA-312, PA-36

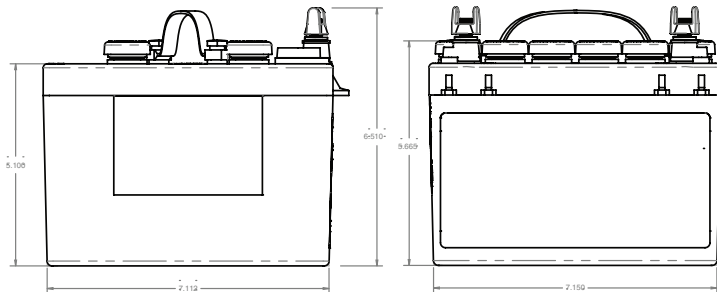

G-243

- Cessna 152, 182

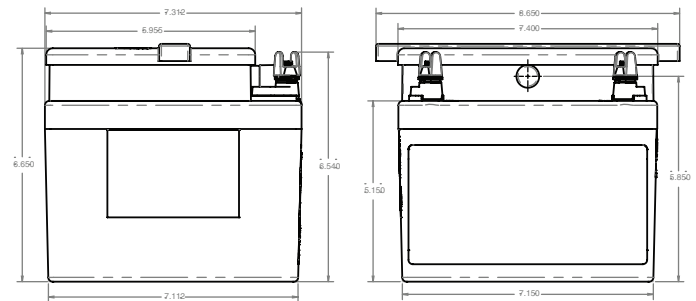

G-240, G-241, G-242, G-243

The Original Equipment Aircraft Battery



TELEDYNE
BATTERY PRODUCTS
A Teledyne Technologies Company

840 W. Brockton Ave., Redlands, CA 92374

(800) 456-0070 • (909) 793-3131

Fax: (909) 793-5818

www.gillbatteries.com